




Technical data WEITZER SPORT 57 SPRUCE

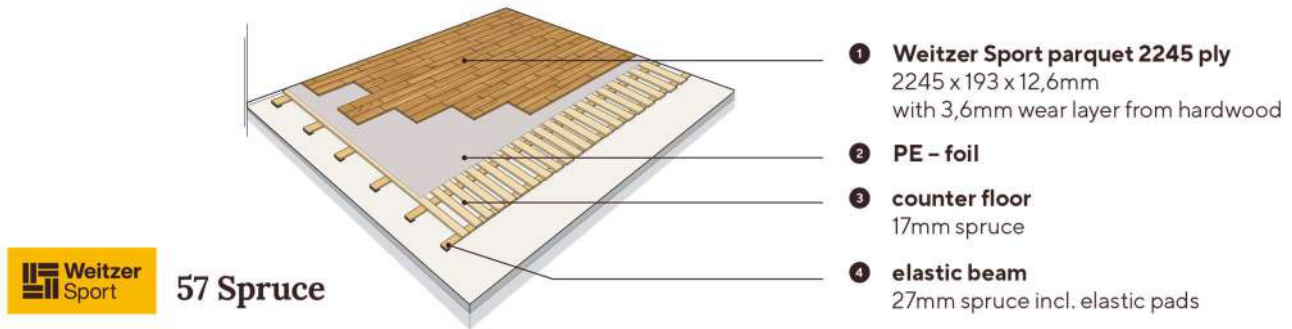

Area-elastic sports flooring for sports and multi-purpose halls according to EN 14904 and DIN 18032-2; April 2001

Total construction height 56,6mm

- 1) Sport parquet WEITZER SPORT 2245 PLY  
3-strip multilayer parquet 2245x193x12,6mm  
Hardwood top layer 3,6mm  
Base from birch plywood, 7 layers  
4-side T&G-profile  
Finish PROSTRONG SPORT  
Stapled to counter floor  
Parquet front joints centred on counter floor  
Stagger: min. 400mm
- 2) PE-Foil Creak protection foil  
0,04mm thickness  
Loosely laid with approx. 100mm overlay
- 3) Counter floor Spruce boards grade I/III 4-side planed, KD  
4000x96x17mm  
Distance/clear approx. 42mm  
Stapled to elastic beam, joints centred  
Stagger: min. 2 elastic beams
- 4) Elastic beam 1-layer build-up 4000x96x27mm  
Spruce boards grade I/III 4-side planed, KD  
Elastic pads from SPORT PUR cushion mat 10mm

WEITZER SPORT parquet incl. certified substructure may only be installed on a subfloor that complies with the current standards and guidelines in accordance with the manufacturer's processing specifications. The subfloor must be sufficiently even, load-bearing, solid and dry. Appropriate building physics measures to protect against receding moisture must be taken prior to installation.