




## Technical data WEITZER SPORT 56 Spruce OSB

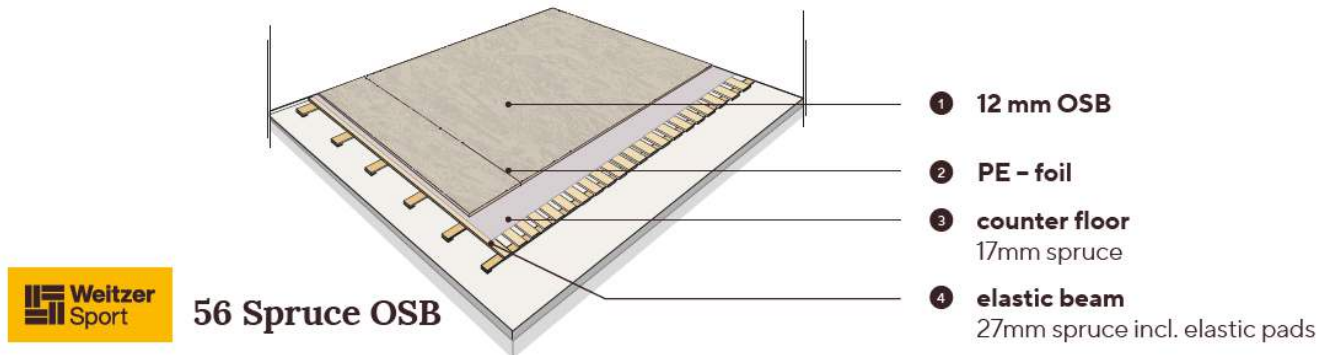

Area-elastic sports flooring for sports and multi-purpose halls according to EN 14904 and DIN 18032-2; April 2001

Total construction height 56,0 mm

- |                     |  |
|---------------------|--|
| 1) Surface covering | OSB Panel with 12mm<br>Screwed down to substructure<br>Without tongue and groove<br>Plywood panels joints centred on counter floor<br>Stagger: min. 400mm<br>Ready for installing a floor covering |
| 2) PE-Foil          | Creak protection foil<br>0,04mm thickness<br>Loosely laid with approx. 100mm overlay   |
| 3) Counter floor    | Spruce boards grade I/III 4-side planed, KD<br>4000x96x17mm<br>Distance/clear approx. 42mm<br>Stapled to elastic beam, joints centred<br>Stagger: min. 2 elastic beams                             |
| 4) Elastic beam     | 1-layer build-up 4000x96x27mm<br>Spruce boards grade I/III 4-side planed, KD<br>Elastic pads from SPORT PUR cushion mat 10mm   |

WEITZER SPORT parquet incl. certified substructure may only be installed on a subfloor that complies with the current standards and guidelines in accordance with the manufacturer's processing specifications. The subfloor must be sufficiently even, load-bearing, solid and dry. Appropriate building physics measures to protect against receding moisture must be taken prior to installation.