




Technical data WEITZER SPORT 56 Spruce PLY

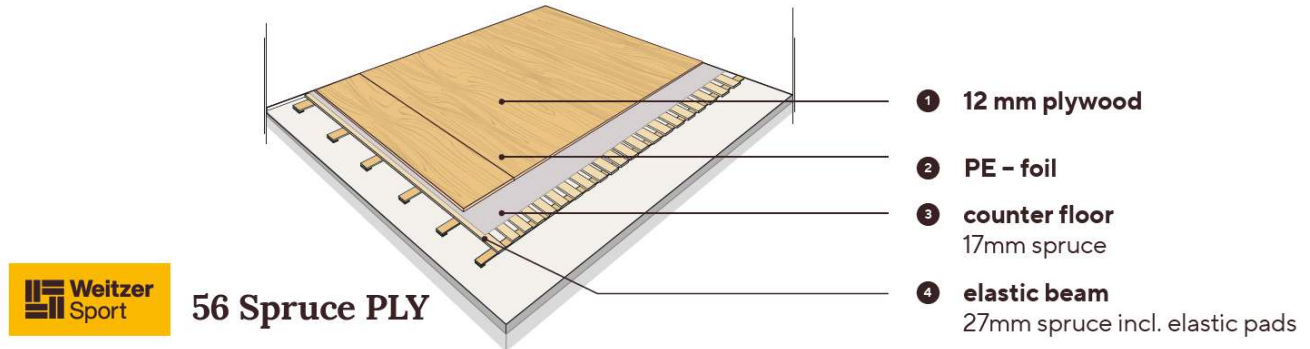

Area-elastic sports flooring for sports and multi-purpose halls according to EN 14904 and DIN 18032-2; April 2001

Total construction height 56,0 mm

- | | |
|---------------------|--|
| 1) Surface covering | Plywood Panel with 12mm
Screwed down to substructure
Without tongue and groove
Plywood panels joints centred on counter floor
Stagger: min. 400mm
Ready for installing a floor covering |
| 2) PE-Foil | Creak protection foil
0,04mm thickness
Loosely laid with approx. 100mm overlay |
| 3) Counter floor | Spruce boards grade I/III 4-side planed, KD
4000x96x17mm
Distance/clear approx. 42mm
Stapled to elastic beam, joints centred
Stagger: min. 2 elastic beams |
| 4) Elastic beam | 1-layer build-up 4000x96x27mm
Spruce boards grade I/III 4-side planed, KD
Elastic pads from SPORT PUR cushion mat 10mm |

WEITZER SPORT parquet incl. certified substructure may only be installed on a subfloor that complies with the current standards and guidelines in accordance with the manufacturer's processing specifications. The subfloor must be sufficiently even, load-bearing, solid and dry. Appropriate building physics measures to protect against receding moisture must be taken prior to installation.