




Technical data WEITZER SPORT 58 SPRUCE



58 Spruce

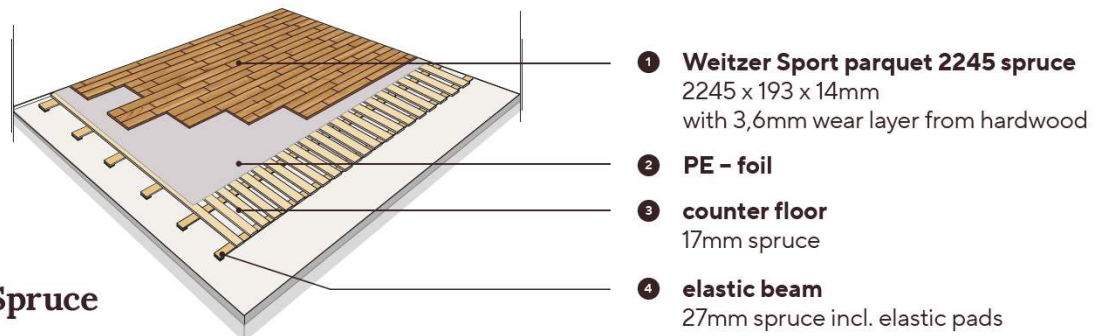

Area-elastic sports flooring for sports and multi-purpose halls according to EN 14904 and DIN 18032-2; April 2001

Total construction height 58,0mm

- 1) Sport parquet
 - WEITZER SPORT 2245 SPRUCE
 - 3-strip multilayer parquet 2245x193x14mm
 - Hardwood top layer 3,6mm
 - Middle layer: solid, quarter-cut spruce rods
 - Bottom layer: rotary-cut spruce veneer
 - 4-side T&G-profile
 - Finish PROSTRONG SPORT
 - Stapled to counter floor
 - Parquet front joints centred on counter floor
 - Stagger: min. 400mm
- 2) PE-Foil
 - Creak protection foil
 - 0,04mm thickness
 - Loosely laid with approx. 100mm overlay
- 3) Counter floor
 - Spruce boards grade I/III 4-side planed, KD
 - 4000x96x17mm
 - Distance/clear approx. 42mm
 - Stapled to elastic beam, joints centred
 - Stagger: min. 2 elastic beams
- 4) Elastic beam
 - 1-layer build-up 4000x96x27mm
 - Spruce boards grade I/III 4-side planed, KD
 - Elastic pads from SPORT PUR cushion mat 10mm

WEITZER SPORT parquet incl. certified substructure may only be installed on a subfloor that complies with the current standards and guidelines in accordance with the manufacturer's processing specifications. The subfloor must be sufficiently even, load-bearing, solid and dry. Appropriate building physics measures to protect against receding moisture must be taken prior to installation.