




## Technical data WEITZER SPORT 82 SPRUCE

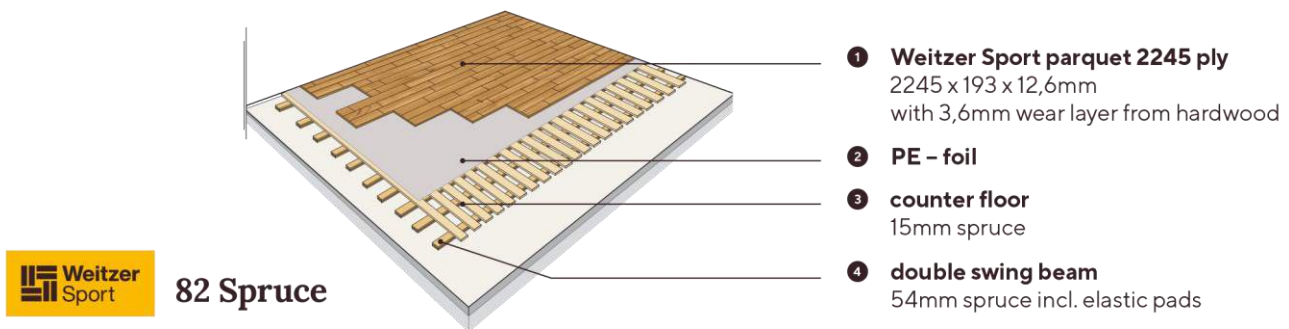

Area-elastic sports flooring for sports and multi-purpose halls according to EN 14904 and DIN 18032-2; April 2001

Total construction height 82,6mm

- 1) Sport parquet
  - WEITZER SPORT 2245 PLY
  - 3-strip multilayer parquet 2245x193x12,6mm
  - Hardwood top layer 3,6mm
  - Base from birch plywood, 7 layers
  - 4-side T&G-profile
  - Finish PROSTRONG SPORT
  - Stapled to counter floor
  - Parquet front joints centred on counter floor
  - Stagger: min. 400mm
- 2) PE-Foil
  - Creak protection foil
  - 0,04mm thickness
  - Loosely laid with approx. 100mm overlay
- 3) Counter floor
  - Spruce boards grade I/III 4-side planed, KD
  - 4000x90x15mm
  - Distance/clear approx. 42mm
  - Stapled to elastic beam, joints centred
  - Stagger: min. 2 elastic beams
- 4) Elastic beam
  - 2-layer build-up 4000x60x65mm
  - With spruce boards, intermediate bar, elastic elements and supports
  - Spruce boards grade I/III 4-side planed, KD
  - Elastic pads from SPORT PUR cushion mat 10mm
  - Intermediate bars and supports from birch plywood

WEITZER SPORT parquet incl. certified substructure may only be installed on a subfloor that complies with the current standards and guidelines in accordance with the manufacturer's processing specifications. The subfloor must be sufficiently even, load-bearing, solid and dry. Appropriate building physics measures to protect against receding moisture must be taken prior to installation.

